


# Automotive Hose

Automotive Hose

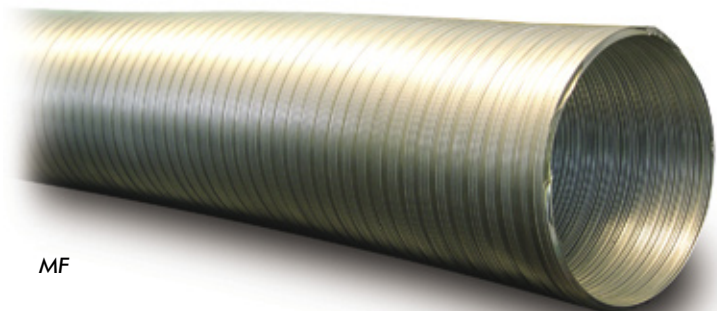

MF

## METAL FLEX-HAND BENDABLE DUCT

### Application:

Used for most installation where there is no flexing, such as vent hoods, air ducts, hot air dryers. Meet UL 181 class I air duct specification. ULCS110 standard methods of tests for air ducts.

### Construction:

Aluminum interlocked construction is self supporting and hand bendable for ease of installation. Advantages include low pressure loss and vibration dampening. Not designed to flex in service.

### Working Pressure:

Max. Positive 12 W.G. Negative 1 W.G.

### Temperature Range:

-51°C to +315°C (-60°F to +600°F)

### Standard Lengths:

10ft only - no cutting

Parts No.	I.D.	Bend Radius Inches
MF-3	3	4-1/2
MF-4	4	6
MF-5	5	7-1/2
MF-6	6	9
MF-7	7	10-1/2
MF-8	8	12
MF-10	10	15
MF-12	12	18



RT

## RT-6 GALVANIZED LOCK SECTION HOSE

### Application:

Automotive exhaust, ventilating ducting, moderate suction lines, duct collecting, air blower ducting

### Construction:

Tube - Galvanized steel  
Metal Thickness - .013" to .016"  
Cover - Fully interlocking galvanized steel

### Temperature Range:

-40°C to +177°C (-40°F to +350°F)

### Standard Lengths:

25ft or 50ft.

\*Also available in Stainless Steel. Call for pricing.

Parts No.	I.D. Inches +0.3	O.D. Inches +0.3	Bend Radius Inches	Approx. Wt. Per. Ft. Lbs.
RT-6-2	2	2.125	13	.90
RT-6-3	3	3.125	21	1.40
RT-6-4	4	4.172	27	1.80
RT-6-5	5	5.172	32	2.30
RT-6-6	6	6.172	42	2.70
RT-6-7	7	7.172	46	3.20

