


Flexaust Hose & Ducting

Flexaust Hose & Ducting

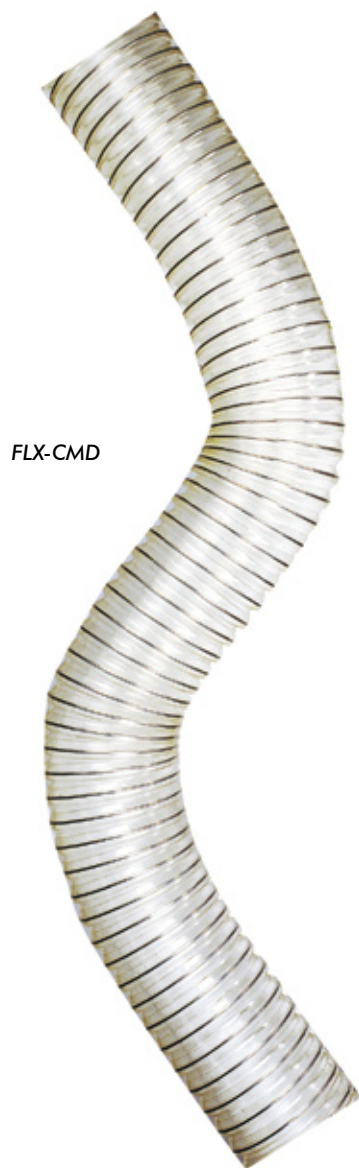

FLX-THANE MD POLYURETHANE

Colour:

Clear

Temperature Range:

-54°C to +107°C (+65°F to +225°F)

Stock Sizes:

2"-12"

Available Sizes:

2"-24"

Standard Stock Sizes:

25ft only

Non Standard Lengths:

Made to order

FLX-THANE MD - This clear, durable urethane hose has excellent resistance to abrasion, cutting and gouging for a long product life. It is reinforced with a bronze coated spring steel wire helix, it maintains its excellent flexing characteristics even in the roughest conditions. The ideal hose for lightweight bulk materials from pharmaceuticals to cement dust. Clear is made with FDA acceptable materials.

Wall Thickness= .030"

Parts No.	I.D. Inches	Weight (lbs./ft.)	Positive Pressure PSI	Negative Pressure IN.HG	Centerline Bend Radius, Inches
FLX-CMD-2	2	.25	30	29.0	2.00
FLX-CMD-2.5	2-1/2	.32	30	29.0	2.50
FLX-CMD-3	3	.40	29	29.0	3.00
FLX-CMD-3.5	3-1/2	.52	28	22.0	3.50
FLX-CMD-4	4	.70	25	29.0	4.00
FLX-CMD-5	5	.90	22	17.0	5.00
FLX-CMD-6	6	1.00	19	15.0	6.00
FLX-CMD-7	7	1.20	16	12.0	7.00
FLX-CMD-8	8	1.50	14	9.0	8.00
FLX-CMD-9	9	1.55	12	5.0	9.00
FLX-CMD-10	10	1.60	11	4.0	8.00
FLX-CMD-12	12	2.00	10	2.2	10.00
FLX-CMD-14	14	2.50	8	3.3	12.00
FLX-CMD-16	16	3.00	7	2.2	14.00
FLX-CMD-18	18	3.30	6	1.40	16.00

*Pressures based on straight lengths of hose @ 72° F.

