


Flexaust Hose & Ducting

Flexaust Hose & Ducting

T-7W

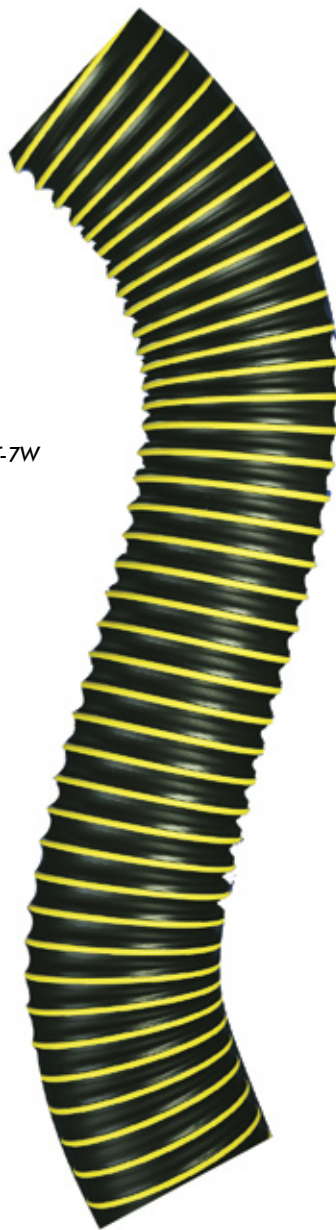

T-7W THERMOPLASTIC RUBBER

Colour:

Black with yellow wearstrip

Temperature Range:

-40°C to +135°C (+40°F to +275°F)

Stock Sizes:

2"-12"

Available Sizes:

2"-24"

Standard Stock Sizes:

25 & 50ft only

Non Standard Lengths:

Made to order

T-7W is a thermoplastic (TPR) hose designed for applications requiring higher temperature ranging from -40°C to +135°C (-40°F to +275°F) while maintaining flexibility. It's designed with a medium weight wall and provides optimum resistance to abrasion, extreme moisture and broad chemical applications. T7 is ozone and UV resistant.

Wall Thickness= .025" - 2"

.030" - 2-1/2" and above

Parts No.	I.D. Inches	Weight (lbs./ft.)	Positive Pressure PSI	Negative Pressure IN.HG	Centerline Bend Radius, Inches
T-7W-2	2	.25	14.00	29.00	2.42
T-7W-2.5	2-1/2	.34	13.00	29.00	3.00
T-7W-3	3	.40	9.50	29.00	3.00
T-7W-3.5	3-1/2	.50	9.50	29.00	4.00
T-7W-4	4	.67	9.00	29.00	5.50
T-7W-5	5	.85	8.00	17.00	5.50
T-7W-6	6	.87	5.00	8.30	5.50
T-7W-7	7	1.00	4.00	3.46	6.50
T-7W-8	8	1.20	4.00	3.46	8.25
T-7W-10	10	2.20	4.00	4.00	10.00
T-7W-12	12	2.70	3.50	3.50	12.00
T-7W-14	14	3.00	3.40	3.40	9.50
T-7W-16	16	3.50	2.60	2.60	11.00
T-7W-18	18	3.90	2.30	2.30	12.00
T-7W-20	20	4.30	2.10	2.10	13.50
T-7W-22	22	4.40	1.90	1.90	15.00
T-7W-24	24	4.80	1.75	1.75	16.00

*Pressures based on straight lengths of hose @ 72° F.

