

Food Handling Hose

Food Handling Hose

PVC FOOD SUCTION & DISCHARGE

Application:

Can be used for any liquids or dry materials for human consumption. Suitable for full vacuum. Complies with all applicable FDA and 3A requirements.

Construction:

Tube - Crystal clear PVC compounded from non-toxic ingredients in compliance with applicable FDA

Reinforcement - Clear PVC Helix for suction applications


Cover - Food grade crystal clear PVC with smooth cover (SF) or corrugated cover (CF)

Temperature Range:

-20°C to +70°C (-4°F to +158°F)

Standard Lengths:

Smooth: 3/4" to 4"	100ft
Smooth: 5" to 6"	20ft
Corrugated: 1" to 6"	100ft cut to multiples of 5ft no charge
Corrugated: 45MM & 57 MM	50ft cut to multiples of 5ft no charge

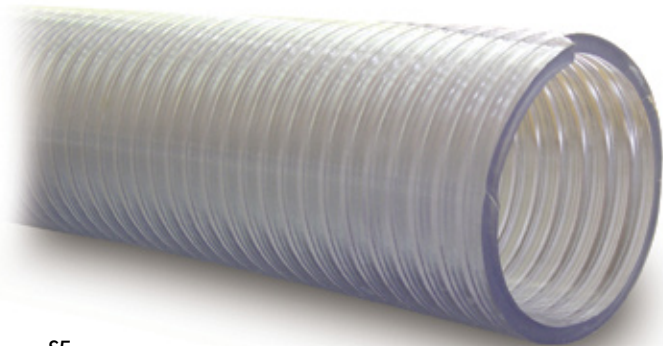

SF

Smooth Cover Clear Helix:

Parts No.	I.D. Inches	O.D. Inches	W.P. Max PSI	Bend Radius Inches	Approx. Wt. Per. Ft. Lbs.
SF-.75	3/4	0.94	86	3	0.16
SF-1	1	1.28	86	3	0.26
SF-1.25	1-1/4	1.56	79	4	0.37
SF-1.5	1-1/2	1.80	72	6	0.44
SF-2	2	2.36	72	8	0.74
SF-2.5	2-1/2	2.88	72	10	1.01
SF-3	3	3.42	62	11	1.21
SF-4	4	4.51	55	18	2.01
SF-5	5	5.51	40	28	2.41
SF-6	6	6.59	30	48	3.28

Corrugated Cover Clear Helix:

Parts No.	I.D. Inches	O.D. Inches	W.P. Max PSI	Bend Radius Inches	Approx. Wt. Per. Ft. Lbs.
CF-1	1	1.30	55	2	0.21
CF-1.25	1-1/4	1.60	50	2	0.28
CF-1.5	1-1/2	1.92	50	3	0.35
CF-2	2	2.40	40	4	0.56
CF-2.5	2-1/2	2.74	40	5	0.77
CF-3	3	3.64	40	6	1.10
CF-4	4	4.72	35	10	1.80
CF-6	6	6.91	30	18	3.70
CF-45MM	45mm	2.09	45	4	0.44
CF-57MM	57mm	2.68	40	4.5	0.64



CF

