


# General Purpose Hose

General Purpose Hose

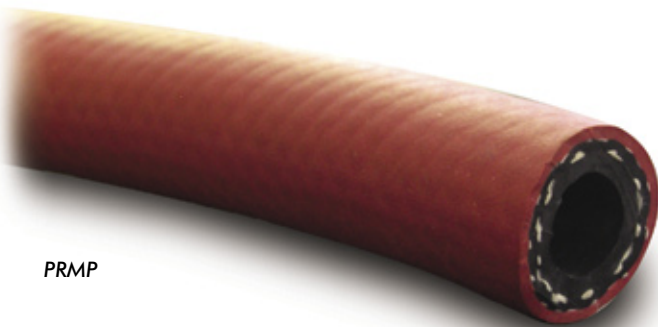

PRMP

## PREMIUM MULTI-PURPOSE (VERSICON) HIGH OIL RESISTANT (NON-CONDUCTIVE)

### Application:

A premium quality long length hose for oil based sprays, gasoline, lubricating oils, air, and some chemicals. This hose is non-conductive.

### Construction:

Tube - Black oil resistance nitrile, Class A

Reinforcement - Spiraled synthetic yarn

Cover - Red PVC/nitrile - oil, grease, weather and abrasion resistant, Class A

### Temperature Range:

-29°C to +82°C (-20°F to +180°F)

### Standard Lengths:

1/4" - 1" 25ft multiples & 700ft reels

1-1/4" 25ft multiples & 550ft reels

1-1/2" 25ft multiples & 400ft reels

Parts No.	I.D. Inches	O.D. Inches	Max W.P. PSI	Approx. Wt. Per. Ft. Lbs.
PRMP-.25-300	1/4	0.63	300	0.16
PRMP-.375-300	3/8	0.72	300	0.18
PRMP-.5-300	1/2	0.88	300	0.25
PRMP-.75-300	3/4	1.16	300	0.42
PRMP-1-300	1	1.50	300	0.63
PRMP-1.25-250	1-1/4	1.78	250	0.82
PRMP-1.5-250	1-1/2	2.03	250	0.95



PVCGP

## PVC GENERAL PURPOSE

### Application:

A moderately priced general purpose PVC hose for handling air, water, oil, chemicals, insecticides and fungicides. Good abrasion resistance.

### Construction:

Tube - Smooth black PVC blend

Reinforcement - Two layers of synthetic yarn

Cover - Smooth red weather & abrasion resistant PVC blend

### Temperature Range:

-5°C to +65°C (-25°F to +150°F)

### Standard Lengths:

1/4" - 1/2" 25ft multiples & 500ft reels

3/4" 25t multiples & 300ft reels

1" 25ft multiples & 300ft reels

Parts No.	I.D. Inches	O.D. Inches	Max W.P. PSI	Approx. Wt. Per. Ft. Lbs.
PVCGP-.25-250	1/4	0.50	250	0.08
PVCGP-.375-250	3/8	0.63	250	0.11
PVCGP-.5-250	1/2	0.75	250	0.14
PVCGP-.75-175	3/4	1.03	175	0.22
PVCGP-1-150	1	1.31	150	0.31

