


Material Handling Hose

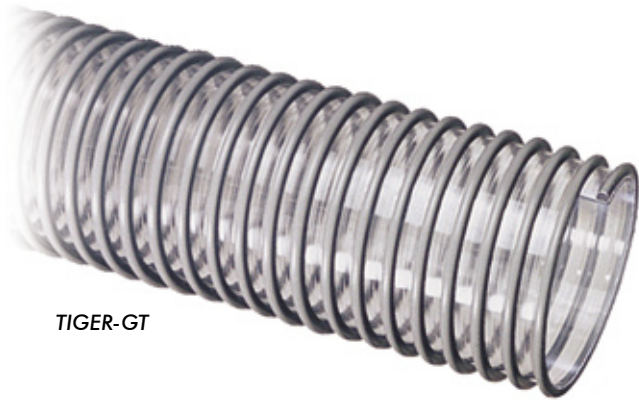

TIGER-GT

TIGERFLEX GT BLOWER HOSE

Application:

GT blower hose is designed for dust collection, fume removal, air vent lines and other vapour removal applications.

Construction:

Tube- Smooth clear PVC

Reinforcement- Exposed grey PVC helix allows for extreme flexibility

Cover- Smooth clear PVC allows visual confirmation that material is flowing

Temperature Range:

-20°C to +65°C (-4°F to +150°F)

Standard Lengths:

1-1/2" to 6" - 100ft & 50ft no cutting

Parts No.	I.D. Inches	O.D. Inches	Vaccum Rating (In. Hg) 68F	Bend Radius Inches	Max W.P. PSI	Approx. Wt. Per. Ft. Lbs.
TIGER-GT-1.5	1-1/2	1.82	22	1	20	0.23
TIGER-GT-2	2	2.39	21	2	15	0.30
TIGER-GT-2.5	2-1/2	2.89	19	2	10	0.39
TIGER-GT-3	3	3.46	18	3	10	0.50
TIGER-GT-4	4	4.50	13	3	8	0.77
TIGER-GT-5	5	5.50	10	5	7	0.91
TIGER-GT-6	6	6.54	7	6	6	1.08

* Other sizes available on request



TR

TIGERFLEX TR1 MATERIAL HANDING HOSE

Application:

Specially engineered rubber blend which gives the ideal combination of light weight, flexibility and superior long-lasting durability. Applications include abrasive material transfer, sand/shot recovery lines, roof rock cleaning, grain handling, fly ash collecting and industrial vacuum equipment.

Construction:

Tube- Specially engineered rubber blend. Smooth bore

Reinforcement- Rigid PVC helix

Cover- Specially engineered rubber blend. Corrugated cover

Temperature Range:

-40°C to +65°C (-40°F to +150°F)

Standard Lengths:

2" to 4" - 50ft & 100ft no cutting

6" - 20ft, 50ft & 100ft no cutting

Parts No.	I.D. Inches	O.D. Inches	Vaccum Rating (In. Hg) 68F	Bend Radius Inches	Max W.P. PSI	Approx. Wt. Per. Ft. Lbs.
TR1-2	2	2.38	FULL	1.5	32	0.50
TR1-3	3	3.56	FULL	2.5	28	1.00
TR1-4	4	4.67	FULL	4.5	26	1.17
TR1-5	5	5.73	28	5	21	2.38
TR1-6	6	6.88	28	9.5	19	3.20