



HT

HOT TAR & ASPHALT

Application:

Designed to handle tar, asphalt, hot oils and other high temperature petroleum based materials at temperatures up to 175°C (350°F).

Construction:

Tube - Special heat resistant black Nitrile
Reinforcement - Textile cords with wire helix
Cover - Corrugated black nitrile
Branding - Unbranded


Temperature Range:

-35°C to +177°C (-31°F to +350°F)

Standard Lengths:

50ft / 100ft

Parts No.	I.D. Inches	O.D. Inches	Bend Radius Inches	Max W.P. PSI	Approx. Wt. Per. Ft. Lbs.
HT-3	3	4.00	18	150	3.47
HT-4	4	4.98	24	150	4.53

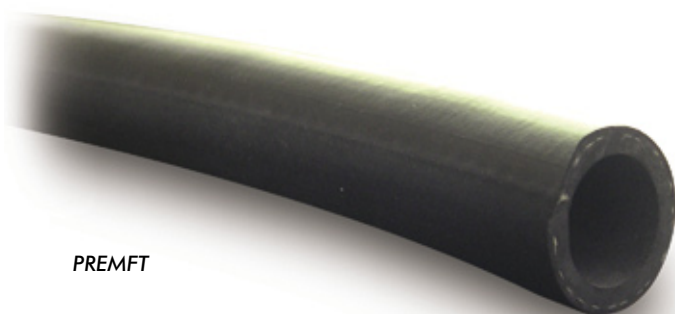

PREMFT

PREMIUM FARM TANK

Application:

For dispensing gasoline, kerosene and oil from farm or barrel-type pumps found on construction, farm and industrial sites.

Construction:

Tube - Black Nitrile
Reinforcement - Polyester yarn with static wire
Cover - Black Nitrile PVC blend with high oil resistance
Branding - Thermoid Premier Farm Tank, Size, Made in U.S.A. with Static Wire

Temperature Range:

-29°C to +71°C (-20°F to +160°F)

Standard Lengths:

Multiples of 25ft and 700ft reels

Parts No.	I.D. Inches	O.D. Inches	Max W.P. PSI	Approx. Wt. Per. Ft. Lbs.
PREMFT-.75	3/4	1.13	60	29
PREMFT-1	1	1.38	60	45