



ST120VP

KANAFLEX ST 120 VP VAPOUR RECOVERY HOSE

Application:

ST 120 VP is designed as a gasoline vapour recovery hose.

Construction:

Tube- Smooth black nitrile rubber

Reinforcement- Rigid PVC helix with static wire for grounding

Cover- Corrugated cover


Temperature Range:

-40°C to +60°C (-40°F to +140°F)

Standard Lengths:

2" to 4" - 60ft & 100ft no cutting.

Parts No.	I.D. Inches	O.D. Inches	Vacuum Rating (In. Hg) 68F	Bend Radius Inches	Max W.P. PSI	Approx. Wt. Per. Ft. Lbs.
ST120VP-2	2	2.36	29.8	3	20	0.61
ST120VP-3	3	3.46	29.8	2.5	10	1.00
ST120VP-4	4	4.57	29.8	5	10	1.70

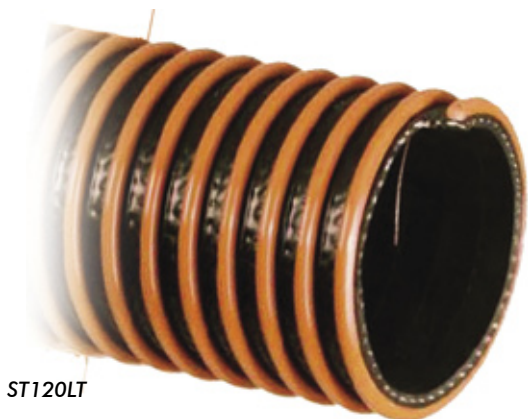

ST120LT

KANAFLEX ST 120 LT DROP HOSE

Application:

ST 120 LT is designed as a gasoline tank truck gravity drop hose for such items as naphtha, kerosene, light and heavy oil, diesel and up to 15% gasohol.

Construction:

Tube- Smooth black nitrile rubber

Reinforcement- Rigid PVC Helix with synthetic braiding. Static wire for grounding

Cover- Corrugated cover

Temperature Range:

-34°C to +60°C (-30°F to +140°F)

Standard Lengths:

2" to 4" - 60ft & 100ft cut to multiples of 5ft

Parts No.	I.D. Inches	O.D. Inches	Vacuum Rating (In. Hg) 68F	Bend Radius Inches	Max W.P. PSI	Approx. Wt. Per. Ft. Lbs.
ST120LT-2	2	2.68	29.8	5	65	1.13
ST120LT-3	3	3.68	29.8	6	65	1.37
ST120LT-4	4	4.82	29.8	8	65	2.16