


EPDM RUBBER 60 DUROMETER

ISO/ASTM DESIGNATION = EPDM

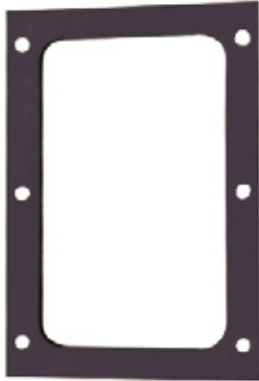

Physical Characteristics:

Tensile: 725 PSI

Elongation: 300%

Hardness: 60 SHORE "A" +/-5

Temperature Range: -30°C to 104°C (-22°F to 220°F)

Parts No.	Gauge x Width	Length	Wt. Per SF lbs.	Colour	Finish
EPDMI-.063-48	1/16" X 48	100FT	0.48	Black	Smooth
EPDMI-.125-48	1/8" X 48	66FT	0.85	Black	Smooth
EPDMI-.188-48	3/16" X 48	66FT	1.22	Black	Smooth
EPDMI-.25-48	1/4" X 48	66FT	1.71	Black	Smooth
EPDMI-.375-48	3/8" X 48	33FT	2.53	Black	Smooth
EPDMI-.5-48	1/2" X 48	33FT	3.38	Black	Smooth

NOTE: EPDM is a polymer that provides superior properties for outdoor and high ozone environment applications. EPDM rubber also provides better resistance to acids, alkali and ketones than other general rubber sheets. EPDM sheet is commonly used for roofing, automotive and other applications where high temperature (up to 220°F) is required. However, EPDM sheet has poor resistance to fuels, oils and alcohols.