

# Steam Hose

# Steam Hose



## FIBREGLASS STEAM

### Application:

For use with saturated steam up to 100 PSI - 170°C (338°F) for thawing and washdown at papermills and food plants. This hose is non-conductive.

### Construction:

Tube - Red heat resistant EPDM synthetic rubber  
Reinforcement - Layers of heat resistant fibreglass  
Cover - Red heat, weather & oil resistant EPDM  
Branding - Black stripe Fibreglass steam non-conductive


### Temperature Range:

-40°C to 170°C (-40°F to 338°F)

### Standard Lengths:

50ft / 100ft

Parts No.	I.D. Inches	O.D. Inches	Max W.P. PSI	Approx. Wt. Per. Ft. Lbs.
FS-.5	1/2	1.03	100	0.36
FS-.75	3/4	1.25	100	0.48
FS-1	1	1.50	100	0.59
FS-1.25	1-1/4	1.81	100	0.78
FS-1.5	1-1/2	2.06	100	0.90
FS-2	2	2.56	100	1.15

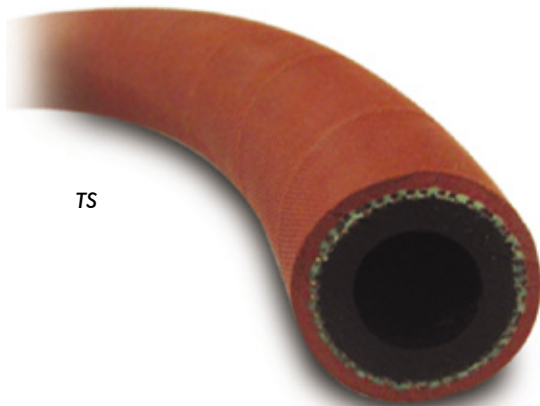

## TEXTILE STEAM

### Application:

For use with saturated steam up to 100 PSI - 170°C (338°F). For thawing, wash down at paper mills and food plants.

### Construction:

Tube - Black heat resistant EPDM synthetic rubber  
Reinforcement - Two layers of heat resistant synthetic yarn  
Cover - Red, heat, weather and oil resistant EPDM

### Temperature Range:

-40°C to 170°C (-40°F to 338°F)

### Standard Lengths:

50ft / 100ft

Parts No.	I.D. Inches	O.D. Inches	Max W.P. PSI	Approx. Wt. Per. Ft. Lbs.
TS-.5	1/2	1.00	100	0.26
TS-.75	3/4	1.25	100	0.38
TS-1	1	1.50	100	0.48