


Water Discharge Hose

Water Discharge Hose

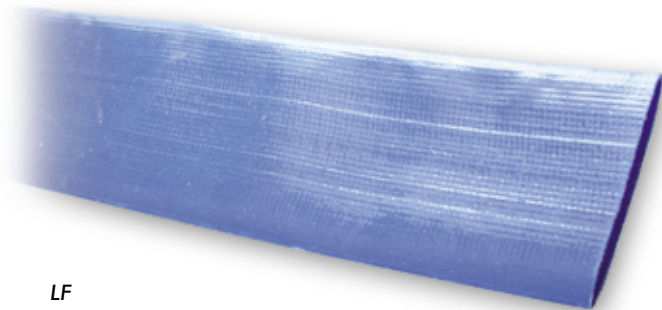

LF

BLUE PVC LAYFLAT

Application:

A light weight duty hose for portable pump and irrigation use. Hose folds flat for ease of coiling and handling. Designed for open end discharge only.

Construction:

Tube - Blue PVC impregnation
Reinforcement - Woven high tensile synthetic yarn
Cover - Blue PVC impregnation


Temperature Range:

-21°C TO +54°C (-5°F TO +130°F)

Standard Lengths:

1-1/2" to 8" - multiples of 25ft to 300ft maximum
10" - multiples of 25ft to 328ft maximum

Parts No.	I.D. Inches	O.D. Inches	Max W.P. PSI	Approx. Wt. Per. Ft. Lbs.
LF-1.5	1-1/2	1.60	70	0.18
LF-2	2	2.11	70	0.24
LF-2.5	2-1/2	2.63	60	0.28
LF-3	3	3.14	55	0.36
LF-4	4	4.14	50	0.50
LF-6	6	6.15	40	0.88
LF-8	8	8.15	35	1.10
LF-10	10	10.18	35	2.00

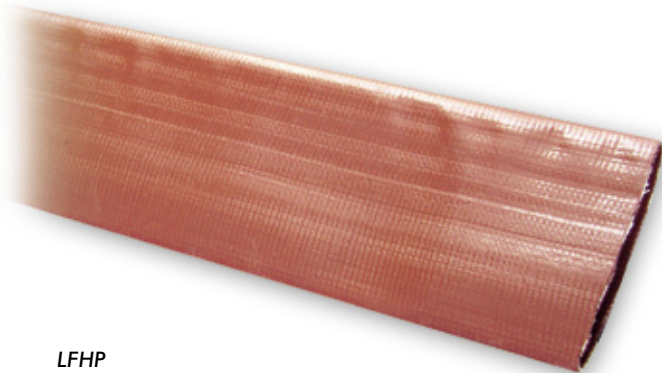

LFHP

BROWN PVC LAYFLAT

Application:

This hose is a more rugged version of our blue PVC layflat hose, designed for use where higher working pressures are required. Designed for open end discharge only.

Construction:

Tube - Brown PVC impregnation
Reinforcement - Woven high tensile synthetic yarn
Cover - Brown PVC impregnation

Temperature Range:

-21°C TO +54°C (-5°F TO +130°F)

Standard Lengths:

Multiples of 25ft to 300ft maximum

Parts No.	I.D. Inches	O.D. Inches	Max W.P. PSI	Approx. Wt. Per. Ft. Lbs.
LFHP-1.5	1-1/2	1.64	120	0.22
LFHP-2	2	2.14	115	0.29
LFHP-2.5	2-1/2	2.67	115	0.41
LFHP-3	3	3.17	100	0.43
LFHP-4	4	4.18	100	0.60
LFHP-6	6	6.18	80	1.01
LFHP-8	8	8.19	80	1.50

