

# Water Discharge Hose

# Water Discharge Hose

## CONTRAFLEX LAYFLAT

### Application:

Designed for discharging water and oil contaminated water at high pressures. An excellent portable pump hose. (Only suitable for handling petroleum products with an aromatic content under 30%)

### Construction:

Tube - Black abrasion and oil resistant nitrile  
Reinforcement - Circular woven polyester yarn  
Cover - Black nitrile, resistant to abrasion, oil and weathering  
Branding - Unbranded

### Temperature Range:


-30°C to +82°C (-22°F to +180°F)

### Standard Lengths:

1-1/2" to 8"      25ft multiples & 300ft coils



CON

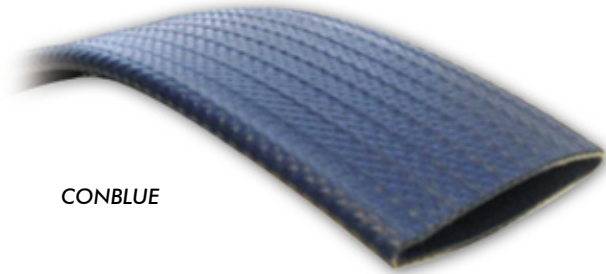

CONBLUE

Parts No.	I.D. Inches	O.D. Inches	Max W.P. PSI	Approx. Wt. Per. Ft. Lbs.
CON-1.5	1-1/2	1.70	200	0.20
CON-2	2	2.25	200	0.30
CON-2.5	2-1/2	2.82	180	0.36
CON-3	3	3.30	180	0.44
CON-4	4	4.27	175	0.67
CON-6	6	6.31	150	1.26
CON-8	8	8.42	145	1.58
CON-10	10	10.35	125	2.38

\* 1-1/2" Available in blue part number = CONBLUE - 1.5