


Water Discharge Hose

Water Discharge Hose

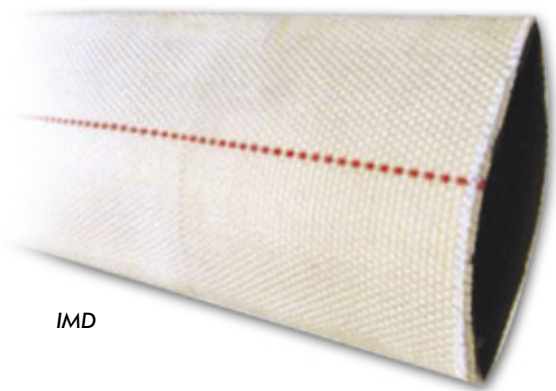

IMD

INDUSTRIAL MILL DISCHARGE

Application:

A very economical pump discharge and washdown hose.
Not approved for fire fighting service.

Construction:

Tube - Extruded synthetic rubber
Cover - White 100% polyester single jacket with red stripe


Temperature Range:

-17°C to +82°C (0°F to +180°F)

Standard Lengths:

1-1/2" to 2-1/2" 25ft / 50ft / 75ft / 100ft

Parts No.	I.D. Inches	Bowl Size Inches	Min Burst PSI	W.P. PSI
IMD-1.5	1-1/2	1-11/16	500	150
IMD-2	2	2-3/16	500	150
IMD-2.5	2-1/2	2-3/4	500	150

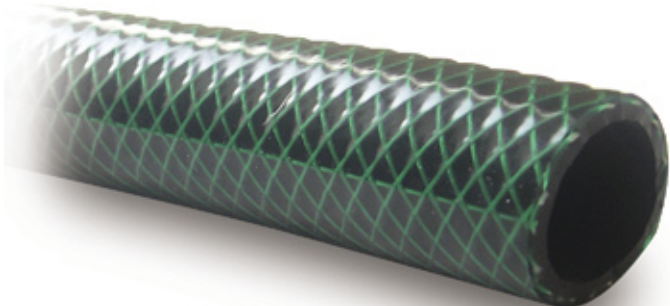

GH

GARDEN HOSE

Application:

For general water service.

Construction:

Tube - Black PVC
Reinforcement - Two layers of polyester cord
Cover - Green weather and abrasion resistant PVC

Temperature Range:

-5°C to +65°C (+25°F to +150°F)

Standard Lengths:

1/2" 50ft / 100ft / 500ft
5/8" & 3/4" 50ft / 100ft / 300ft
1" 50ft / 100ft / 200ft

Parts No.	I.D. Inches	O.D. Inches	Max W.P. PSI	Approx. Wt. Per. Ft. Lbs.
GH-.5	1/2	.70	125	0.115
GH-.625	5/8	.80	125	0.118
GH-.75	3/4	1.00	100	0.208
GH-1	1	1.31	100	0.345

