


Water Suction Hose

Water Suction Hose

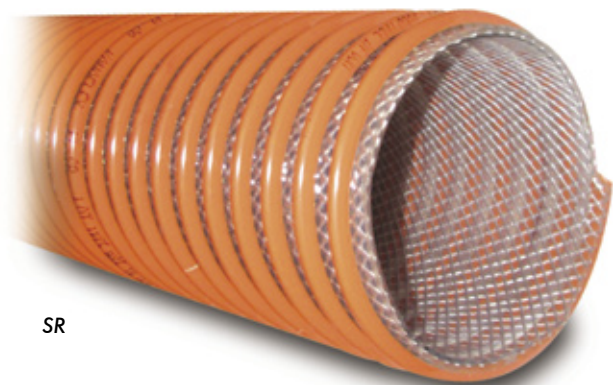

SR

KANALINE SR SUCTION & DISCHARGE

Application:

Heavy duty suction and discharge hose for use in fish suction and construction pumping.

Construction:

Tube - Smooth clear PVC
Reinforcement - Braided synthetic yarn
Cover - External PVC helix provides abrasion resistance and easy dragging

Temperature Range:

-25°C to +70°C (-13°F to +158°F)

Standard Lengths:

6" 100ft cut to multiples of 10ft.
8" 25ft no cutting.
10" 20ft no cutting.

| Parts No. | I.D. Inches | O.D. Inches | Bend Radius Inches | Max W.P. PSI | Approx. Wt. Per. Ft. Lbs. |
|-----------|-------------|-------------|--------------------|--------------|---------------------------|
| SR-2 | 2 | 2.60 | 4.0 | 100 | 0.70 |
| SR-3 | 3 | 3.70 | 6.3 | 100 | 1.13 |
| SR-4 | 4 | 4.78 | 7.1 | 75 | 1.74 |
| SR-6 | 6 | 7.17 | 10.2 | 70 | 3.88 |
| SR-8 | 8 | 9.33 | 15.7 | 60 | 5.54 |
| SR-10 | 10 | 11.63 | 24.8 | 40 | 8.68 |
| SR-12 | 12 | 13.66 | 45.0 | 28 | 10.30 |



SPA

SPA HOSE

Application:

A very flexible hose designed for use in the installation of tubs, spas, swimming pools, filters, and similar water transfer applications.

Construction:

Tube - Smooth PVC
Reinforcement - PVC helix
Cover - Solid cream PVC

Temperature Range:

-20°C to +65°C (-4°F to +150°F)

Standard Lengths:

100ft. No cutting

| Parts No. | I.D. Inches | O.D. Inches | Max W.P. PSI@21C (70F) | Approx. Wt. Per. Ft. Lbs. |
|-----------|-------------|-------------|------------------------|---------------------------|
| SPA-.5 | 1/2 | 0.827 | 100 | 0.14 |
| SPA-.75 | 3/4 | 1.055 | 100 | 0.21 |
| SPA-1 | 1 | 1.320 | 100 | 0.27 |
| SPA-1.25 | 1-1/4 | 1.665 | 80 | 0.36 |
| SPA-1.5 | 1-1/2 | 1.904 | 70 | 0.41 |
| SPA-2 | 2 | 2.381 | 70 | 0.59 |

