



BREW

## BREWERS AND BEVERAGE DISCHARGE

### Application:

For handling beer, wine, and fruit juice where taste, odour, and smell must not be affected. The extremely smooth tube resists the collection of bacteria. For dairy specific applications see Milk Hose.

### Construction:

Tube - Taste free, FDA approved synthetic rubber (not oil resistant)  
 Reinforcement - Multiple spirals of synthetic yarn  
 Cover - Red abrasion resistant rubber  
 Branding - Solid Yellow Stripe


### Temperature Range:

-35°C to +82°C (-31°F to +180°F)

### Standard Lengths:

50ft / 100ft

Parts No.	I.D. Inches	O.D. Inches	Max W.P. PSI	Approx. Wt. Per. Ft. Lbs.
BREW-.75	3/4	1.28	400	0.52
BREW-1	1	1.57	400	0.62
BREW-1.25	1-1/4	1.85	400	0.84
BREW-1.5	1-1/2	2.19	400	1.18
BREW-2-4	2 x 4 ply	2.72	300	1.57
BREW-2-6	2 x 6 ply	2.94	350	2.17
BREW-2.5	2-1/2	3.46	350	2.88
BREW-3	3	4.15	250	4.19

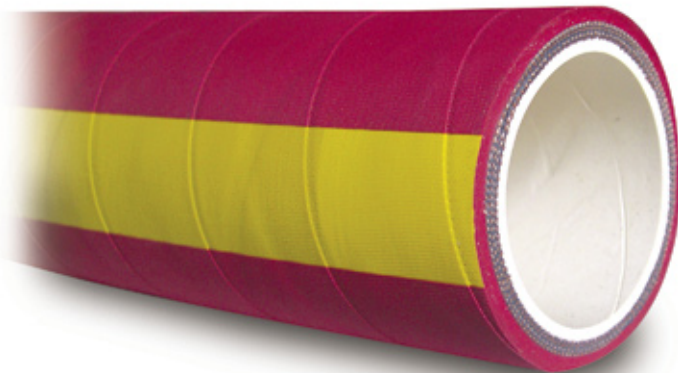

BBS

## BREWERS AND BEVERAGE SUCTION

### Application:

For handling beer, wine, and fruit juice where taste, odour and smell must not be affected. The extremely smooth tube resists the collection of bacteria. Facilitates easy cleaning. For dairy specific applications see Milk Hose.

### Construction:

Tube - Taste free, FDA approved synthetic rubber (not oil resistant)  
 Reinforcement - A high tensile steel wire helix and textile cords  
 Cover - Red abrasion resistant rubber  
 Branding - Solid Yellow Stripe

### Temperature Range:

-35°C to +82°C (-31°F to +180°F)

### Standard Lengths:

25ft / 50ft / 75ft / 100ft

Parts No.	I.D. Inches	O.D. Inches	Bend Radius Inches	Max W.P. PSI	Approx. Wt. Per. Ft. Lbs.
BBS-1.5	1-1/2	2.08	9	250	1.27
BBS-2	2	2.68	14	200	1.79